

ODM 400-V Vertical Packaging Machines
With Auger (screw) Dosing System

**Vidalı Dolum Sistemli Dikey
Paketleme Makinası**



ODM 400 Vertical Packaging Machine makes Stand up, quadro back and Pillow bag types.



The max. weight to pack is 2500 gr. The Max pack sizes are 260*400 mm It's manufacturing as either servo or pneumatic according to the demanded capacity. Suitable for powders and similar fine products. A specific screw for each product, precisely doses the correct amount directly into the forming tube of the packaging machine. Suitable for products like, Cocoa, Milk Powder, Spices, Salt, Powder Detergent, Instant Drinks, Coffee and etc....

ODM 400 Dikey paketleme makinası Yastık, Oturan ve quadro paket yapabilmektedir.

Max. 2500 gr paketleme yapabilmektedir. Max paket ebadı 260*400 mm dir. İstenilen üretim kapasitesine bağlı olarak pnömatrik veya servo kontrollü olarak üretilmektedir. Akılcılığı olmayan toz haldeki mamüllerin tam otomatik olarak paketlenmesinde kullanılmaktadır. Genellikle baharatlar, toz kahve, süt tozu, mix un, kremşanti, katkı maddeleri, tarım ilaçları vb. toz ürünlerin ambalajlanmasında kullanılır.

Accessories

- Feeding Elevator
- Output Conveyor
- Printer
- Folding Unit for Standup bag
- Quadro bag System
- Metal Detector
- Checkweigher
- Dust Sucking System
- Gas Flushing System
- Anti-static bar
- Euro hole device
- Round hole Device
- Inserter cards system
- Labeling System

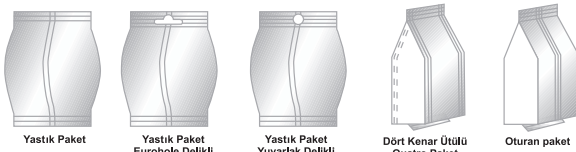

Technical Details Teknik Detay	ODM 400-V	ODM 400SM-V
Filling System / Dolum Sistemi	Auger (screw) Dosing System / Servo Vidalı Dolum Sistemli	
Suitable for / Paketlenebilen ürünler	Coffee, crema, milk powder, whipped cream, starch, powder spices, trim hypnotic, additives and etc... Kahve, krema, süt tozu, krem şanti, nişasta, toz baharat ürünleri, katkı maddeleri, tarım ilaçları vb. toz ürünler	
Filling Range / Gramaj Aralığı	20- 2500 gr	
Shape of the Bag / Paket Tipleri	Pillow bag, Stand up bag, Quadro Bag / Yastık paket, Oturan paket, Quadro paket	
Packaging Speed / Paketleme Hızı	20-50 ppm / 20-50 pak/dakika	20-60 ppm / 20-60 pak/dakika
Type of Packaging Material / Ambalaj Malzemesi Cinsi	OPP, CPP, Pet, Alu, Metalize and other laminated films / Opp, Cpp, Pet, Alu, Metalize vb. laminasyonlu malzemeler	
Min. Dimensions of the Bag / Min. Paket Eni ve Boyu	70 x 100 mm	70 x 100 mm
Max. Dimensions of the Bag / Max. Paket Eni ve Boyu	260 x 400 mm	260 x 400 mm
Max. Width of the Film / Max. Bobin Eni	550 mm	550 mm
Inner Diameter of the Core / Bobin Makarasi İç Çapı	76 mm	76 mm
Max. Diameter of the Roll / Max. Bobin Çapı	500 mm	500 mm
Dimensions of the Machine / Makine Ebatları	1700 x 2200 x 2800 mm	1700 x 2200 x 2800 mm
Weight of the Machine / Makine Ağırlığı	1.250-kg	1.250-kg
Mechanic Structure / Mekanik Kontrol Sistemi	Pneumatic / Pnömatik	By servo / İki eksen servo kontrollü
Pneumatic Systems / Pnömatik Sistem	Festo	Festo
Control System / Elektrik Sistemi	SIEMENS / OMRON	SIEMENS / OMRON
Electricity Supply & Consumption / Elektrik Beslemesi ve Tüketimi	380 Volt AC / 5 Kwh	380 Volt AC / 6 Kwh
Air Supply & Consumption / Hava Beslemesi ve Tüketimi	6 bar / 300 Lt / min.	6 bar / 100 Lt / min