



ODM 400 Vertical Packaging Machines With Volumetric Dosing System


Volumetrik Dolum Sistemli Dikey Paketleme Makinası

ODM 400 Vertical Packaging Machine makes Stand up, quadro back and Pillow bag types. The max. weight to pack is 2500 gr. The Max pack sizes are 260*400 mm It's manufacturing as either servo or pneumatic according to the demanded capacity. Suitable for products like, Rice, Beans, Chickpea, Lentils, Sugar, Nuts, Powder Detergent, Coffee Beans, Salt and etc.

ODM 400 Dikey paketleme makinası Yastık, Oturan ve quadro paket yapabilmektedir. Max. 2500 gr paketleme yapabilmektedir. Max paket ebadı 260*400 mm dir. İstenilen üretim kapasitesine bağlı olarak pnömatrik veya servo kontrollü olarak üretilmektedir. Serbest akıcılığı olan taneli-granül haldeki mamüllerin tam otomatik olarak paketlenmesinde kullanılmaktadır. Genellikle bakliyat ürünleri, prinç mercimek makarna, taneli baharat ürünlerinin ambalajlanmasında kullanılır.

Accessories

- Feeding Elevator
- Output Conveyor
- Printer
- Folding Unit for Standup bag
- Quadro bag System
- Metal Detector
- Checkweigher
- Dust Sucking System
- Gas Flushing System
- Anti-static bar
- Euro hole device
- Round hole Device
- Inserter cards system
- Labeling System

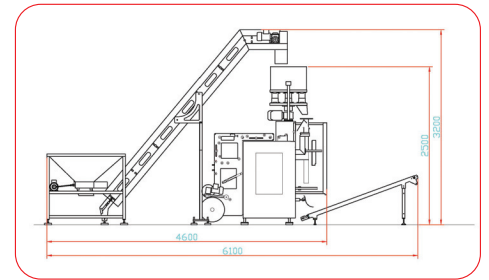

| Technical Details Teknik Detay | ODM 400 | ODM 400SM |
|---|---|--------------------------------------|
| Filling System / Dolum Sistemi | Volumetric Dosing System / Volumetrik Dolum Sistemi | |
| Suitable for / Paketlenebilen ürünler | Rice, Beans, Chickpea, Lentils, Sugar, Nuts, Powder Detergent, Coffee Beans, Salt and etc. Bakliyat, baharat, kuruyemiş v.b. taneli ürünler. | |
| Filling Range / Gramaj Aralığı | 20- 2500 gr | |
| Shape of the Bag / Paket Tipleri | Pillow bag, Stand up bag, Quadro Bag / Yastık paket, Oturan paket, Quadro paket | |
| Packaging Speed / Paketleme Hızı | 20-50 ppm / 20-50 pak/dakika | 40-80 ppm / 40-80 pak/dakika |
| Type of Packaging Material / Ambalaj Malzemesi Cinsi | OPP, CPP, Pet, Alu, Metalize and other laminated films / Opp, Cpp, Pet, Alu, Metalize vb. laminasyonlu malzemeler | |
| Min. Dimensions of the Bag / Min. Paket Eni ve Boyu | 70 x 100 mm | 70 x 100 mm |
| Max. Dimensions of the Bag / Max. Paket Eni ve Boyu | 260 x 400 mm | 260 x 400 mm |
| Max. Width of the Film / Max. Bobin Eni | 550 mm | 550 mm |
| Inner Diameter of the Core / Bobin Makarasi İç Çapı | 76 mm | 76 mm |
| Max. Diameter of the Roll / Max. Bobin Çapı | 500 mm | 500 mm |
| Dimensions of the Machine / Makine Ebatları | 1700 x 2200 x 2800 mm | 1700 x 2200 x 2800 mm |
| Weight of the Machine / Makine Ağırlığı | 1.250-kg | 1.250-kg |
| Mechanic Structure / Mekanik Kontrol Sistemi | Pneumatic / Pnömatik | By servo / İki eksen servo kontrollü |
| Pneumatic Systems / Pnömatik Sistem | Festo | Festo |
| Control System / Elektrik Sistemi | SIEMENS / OMRON | SIEMENS / OMRON |
| Electricity Supply & Consumption / Elektrik Beslemesi ve Tüketimi | 380 Volt AC / 5 Kwh | 380 Volt AC / 6 Kwh |
| Air Supply & Consumption / Hava Beslemesi ve Tüketimi | 6 bar / 300 Lt / min. | 6 bar / 100 Lt / min |